


## SNUBBERS



LCR TYPE	CHMS/A/C	CHMS/R/C	LPS	FHMS/R/C	FP/S/WF
RATED DC VOLTAGE AC	3600 V PK-PK	1600 V PK-PK	4000 V PK-PK	3600 V PK-PK	1700 V PK-PK
CAPACITANCE VOLTAGE	6 - 10 $\mu$ F	6 - 10 $\mu$ F	0.5 - 1 $\mu$ F	2 - 5 $\mu$ F	0.1 - 0.47 $\mu$ F
CAPACITANCE TOLERANCE $\pm$ %	5% - 10%	5% - 10%	5% - 10%	5% - 10%	5% - 10%
TERMINATION SPACING	HDC	HDC	AXIAL SCREW	HDC	T.C.W.
CLIMATIC CATEGORY	40-085-56	40-085-56	25-70-21	40-085-56	40-085-21
PULSE RISE TIME dV/dT	$\sim$ 500V/ $\mu$ s	$\sim$ 500V/ $\mu$ s	$\sim$ 1500V/ $\mu$ s	$\sim$ 500V/ $\mu$ s	$\sim$ 1000V/ $\mu$ s
MAXIMUM RMS CURRENT	45-70	45-70	16	40	10

## INTERFERENCE SUPPRESSOR CAPACITORS

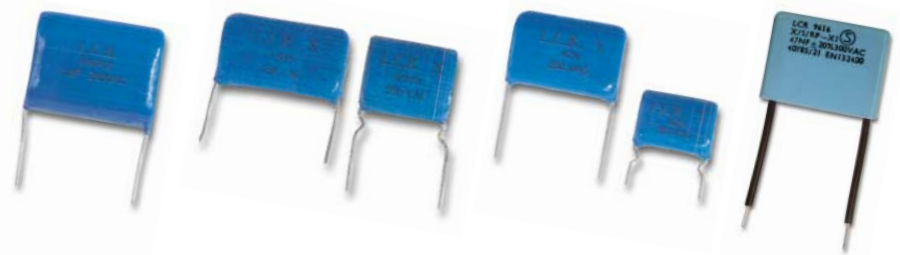

LCR TYPE	MKP/X	X/S/ED	Y/S/ED	X/S/RP
RATED DC VOLTAGE AC	250 VAC	250 VAC	250 VAC	300 VAC
CAPACITANCE RANGE	10 nF - 2.2 $\mu$ F	10 nF - 1 $\mu$ F	2.2 nF - 47 nF	47 nF
CAPACITANCE TOLERANCE $\pm$ %	5%, 10%, 20%	5%, 10%, 20%	5%, 10%, 20%	5%, 10%, 20%
TERMINATION SPACING	15 - 37.5mm	15 - 27.5mm	15 - 22.9mm	26mm
CLIMATIC CATEGORY	25-085-21	25-085-21	25-085-21	40-085-21
PULSE RISE TIME dV/dT	50V/ $\mu$ s	100V/ $\mu$ s	100V/ $\mu$ s	100V/ $\mu$ s
DIELECTRIC	POLYPROPYLENE	POLYESTER	POLYESTER	POLYPROPYLENE SEMKO APPROVED