



FILTER PULSE HIGH FREQUENCY CAPACITORS

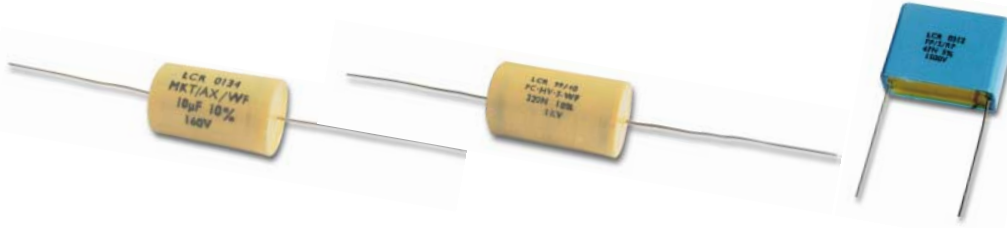

LCR TYPE	PC/HV/WF	PC/HV/S/WF	FP/S/RP
RATED DC VOLTAGE AC	1000 - 1500 VDC	1000 - 2000 VDC	1000 - 2000 VDC
CAPACITANCE RANGE	1 nF - 470 nF	1 nF - 470 nF	1 nF - 82 nF
CAPACITANCE TOLERANCE $\pm\%$	5%, 10%, 20%	5%, 10%, 20%	5%, 10%, 20%
TERMINATION	AXIAL LEADS	AXIAL LEADS	RADIAL LEADS
CLIMATIC CATEGORY	55-085-21	55-100-21	40-85-21
PULSE RISE TIME dV/dT	50V/ μ s	1000 - 2000V/ μ s	\sim 2500V/ μ s
DIELECTRIC	POLYPROPYLENE	POLYPROPYLENE	POLYPROPYLENE

COUPLING DECOUPLING TIMING CAPACITORS

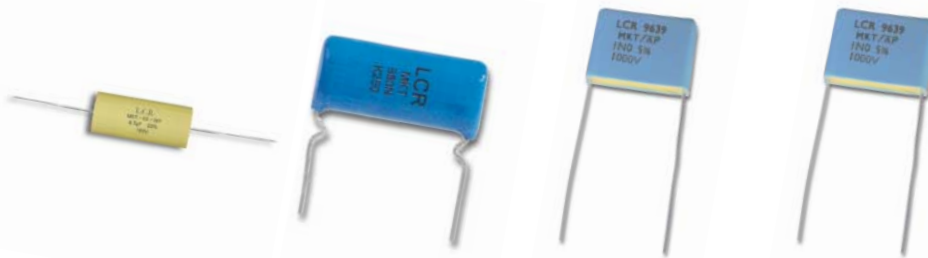

LCR TYPE	MKT/AX/WF	MKT/R	MKT/RP	MKP/RP
RATED DC VOLTAGE AC	63 - 630 VDC	160 - 630 VDC	160 - 630 VDC	160 - 630 VDC
CAPACITANCE RANGE	0.01 - 10 μ F	0.01 - 10 μ F	0.01 - 10 μ F	0.01 - 2.2 μ F
CAPACITANCE TOLERANCE $\pm\%$	5%, 10%, 20%	5%, 10%, 20%	5%, 10%, 20%	5%, 10%, 20%
TERMINATION SPACING	AXIAL LEADS or PREFORMED	10.2 - 27.9mm	10.2 - 27.9mm	10.2 - 37.5mm
CLIMATIC CATEGORY	40-100-21	40-085-21	40-085-21	25-85-56
PULSE RISE TIME dV/dT	10 - 50V/ μ s	10V/ μ s	10V/ μ s	10 - 50V/ μ s
DIELECTRIC	POLYESTER	POLYESTER	POLYESTER	POLYPROPYLENE